



COVER U – FASCIA COVER SYSTEM

PRODUCT SPECIFICATIONS

MagnaFlow™ Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.
Pure Copper Copper 3/4 Hard	0.55mm Grade C12200
Flashing	Synthetic - DPC, or Bitumin - DPC
Maximum Fixing spacing	1200mm
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.

IMPORTANT INSTALLATION INFORMATION

Gable ends will require refixing of barge flashings

Cover U is designed to cover timber based materials

Cover U -fascia system, fastens to an existing fascia system, the timber fascia material needs to be free from excessive rot.

An asbestos test may be required before or during installation . This is at the customers cost.


Depending on the condition and straightness of the timber fascia system being adhered to, Cover U system will assist in straightening minor variations. It is not intended to straighten areas where excessive truss movement has occurred over time.

Metal fascia's are a specialised system that require specialised installers.

We do not recommend, support or approve DIY installations. Continuous Group offer an installation service throughout New Zealand. Refer to our website for contact and location details. www.continuous.co.nz/contact

Cover U

Multi Fit Fascia Cover System

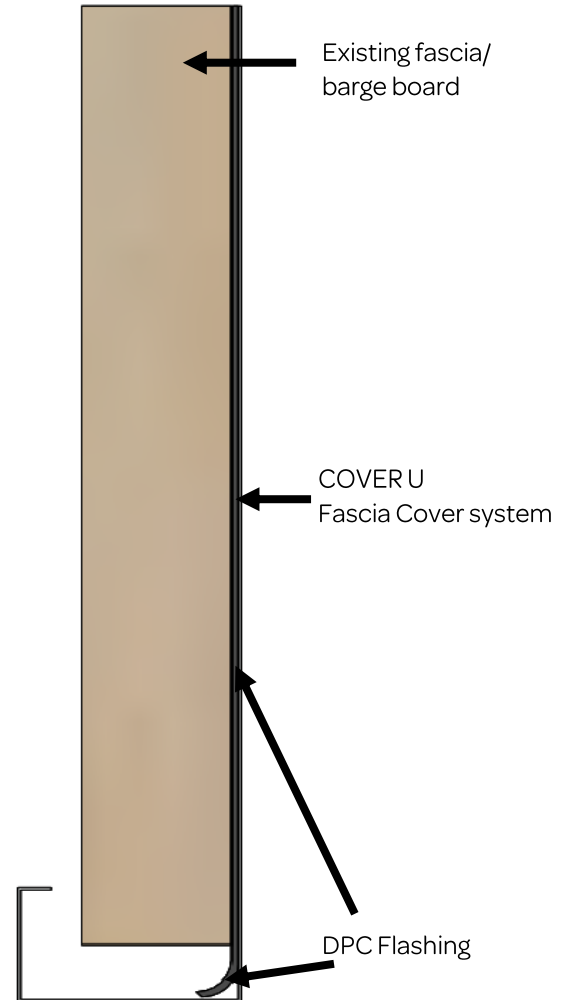

Scope of use	Continuous Group Fascia Cover systems are intended for use as fascia and barge boards to support spouting systems, covering existing timber fascias around the roof perimeter on timber trussed residential buildings.
NZBC Compliance	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of fascia systems, indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature., Continuous Group Fascia Cover systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
Durability	All copper, brass and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
Maintenance	Continuous Group Fascia Cover systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the fascia surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website www.continuous.co.nz/care-and-maintenance
Warranty	MagnaFlow™ : Environment zone B, C & D – 10 year paint warranty ; 15 year perforation warranty. Pure Copper : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at www.continuous.co.nz/warranties