



Note—Product shape may vary between regions.

## Overview

Halo 200 Combines the same stunning aesthetics of its smaller European cousins while providing additional roof coverage and extra large water capacity.

## Features

- ✓ European Lineage
- ✓ Stunning aesthetics
- ✓ Premium Material options
- ✓ Huge colour choice
- ✓ Bracket options to suit
- ✓ Up to 20 year material warranty
- ✓ Extra large water capacity



HALO 200 HALF ROUND



Finish Range	Spouting Material	Colour Choice	Bracket Material	Bracket Options	Downpipe Options
CG Range	MagnaFlow™	Top 15 Colours	Aluminium	Custom designed bracket powder-coated aluminium	80mm Round 100mm Round
Designer Range	MagnaFlow™	34 Designer Colours	Aluminium		
Endurance Range	AlumiGard™	Top 4 Colours	Aluminium		
Euro Range	EuraMax	4 Premium Colours	Aluminium		
Copper	Pure Copper	Natural	Copper or Brass	Custom designed copper brackets	

## Available from these Continuous Group Locations:

NORTHLAND | AUCKLAND | WAIKATO | BAY OF PLENTY  
 TARANAKI | GISBORNE | HAWKES BAY | MANAWATU | WELLINGTON  
 NELSON | MARLBOROUGH | WEST COAST | CANTERBURY | OTAGO | SOUTHLAND



# HALO 200 HALF ROUND

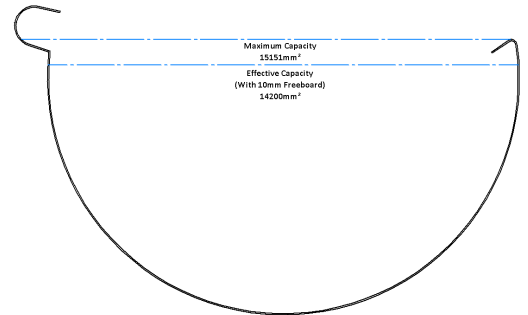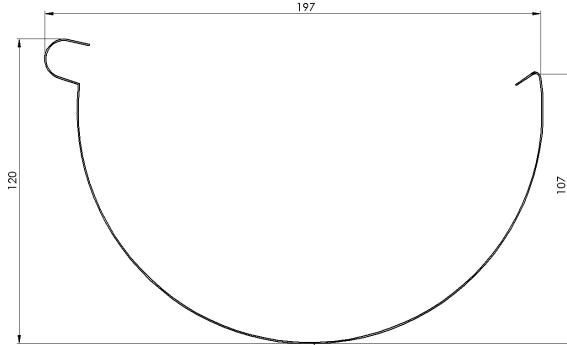

PRODUCT SPECIFICATIONS		CAPACITY SPECIFICATIONS	
<b>MagnaFlow™</b> Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.	Maximum cross sectional area	15,151mm <sup>2</sup>
<b>AlumiGard™</b> Pre-painted Aluminium	0.70mm Grade 5005 H34	Effective cross sectional area with 10mm freeboard	14,200mm <sup>2</sup>
<b>EuraMax</b> Pre-painted Aluminium	0.80mm Grade 5754 H42	Flow Capacity	248 Litres/min
<b>Pure Copper</b> Copper 3/4 Hard	0.60mm Grade C12200	Recommended fall	1:500 = 2mm per 1 metre
Custom rolled bracket	3-5mm Aluminium 6060 T5 4-5mm Copper	Minimum Downpipe cross section	4,776mm <sup>2</sup>
Custom Razor Bracket	3.00mm Aluminium 5052 H34	Recommended round standard downpipe sizes	100mm Ø = 7,539mm <sup>2</sup> 80mm Ø = 4,776mm <sup>2</sup>
Recommended maximum bracket spacing	750mm 600mm where snow fall is possible		
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.		

<b>Scope of use</b>	Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope).
<b>NZBC Compliance</b>	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
<b>Durability</b>	All copper, brass and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
<b>Maintenance</b>	Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website <a href="http://www.continuous.co.nz/care-and-maintenance">www.continuous.co.nz/care-and-maintenance</a>
<b>Warranty</b>	<b>MagnaFlow™</b> : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. <b>MagnaFlow™</b> : Environment zone D—10 year paint warranty ; 10 year perforation warranty. <b>AlumiGard™</b> : 10 year paint warranty ; 12 year perforation warranty. <b>Pure Copper &amp; EuraMax</b> : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at <a href="http://www.continuous.co.nz/warranties">www.continuous.co.nz/warranties</a>