




# Continuous Group®

## Spouting Fascia Downpipes

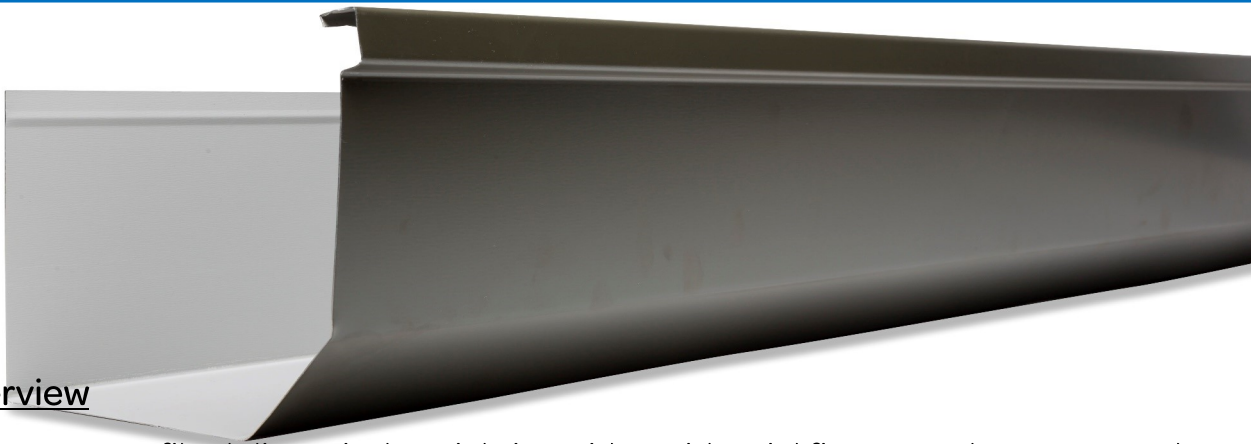

### Overview

The Texan profile delivers industrial size with residential finesse. When you need high volume performance and some serious strength but do not want that unsightly industrial appearance, Texan is the answer.

### Features

- ✓ Stunning aesthetics
- ✓ Premium Material options
- ✓ Huge colour choice
- ✓ Pan bracket options
- ✓ Up to 20 year material warranty
- ✓ Extra large water capacity



**TEXAN** 175mm BEVEL SPOUTING

Finish Range	Spouting Material	Colour Choice	Bracket Material	Bracket Options	Downpipe Options
<i>CG Range</i>	<i>MagnaFlow™</i>	Top 15 Colours	Aluminium	External TB External TB-Pan	80mm Round 100mm Round 150mm Round 4x2" Rectangle
<i>Designer Range</i>	<i>MagnaFlow™</i>	34 Designer Colours	Aluminium		
<i>Endurance Range</i>	<i>AlumiGard™</i>	Top 4 Colours	Aluminium		
<i>Euro Range</i>	<i>EuraMax</i>	4 Premium Colours	Aluminium		
<i>Copper</i>	<i>Pure Copper</i>	Natural	Copper or Brass		

### Available from these Continuous Group Locations:



NORTHLAND | AUCKLAND | WAIKATO | BAY OF PLENTY  
 TARANAKI | GISBORNE | HAWKES BAY | MANAWATU | WELLINGTON  
 NELSON | MARLBOROUGH | WEST COAST | CANTERBURY | OTAGO | SOUTHLAND

0800 50 1993

WWW.CONTINUOUS.CO.NZ



# TEXAN 175mm BEVEL SPOUTING

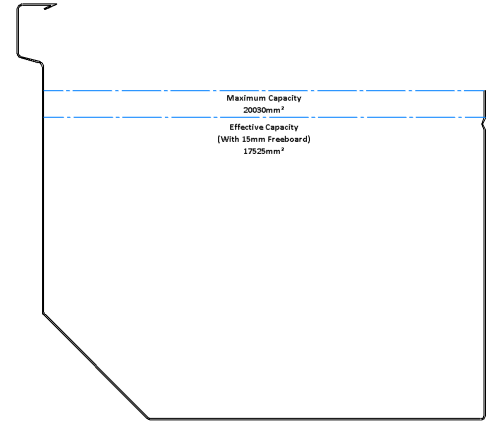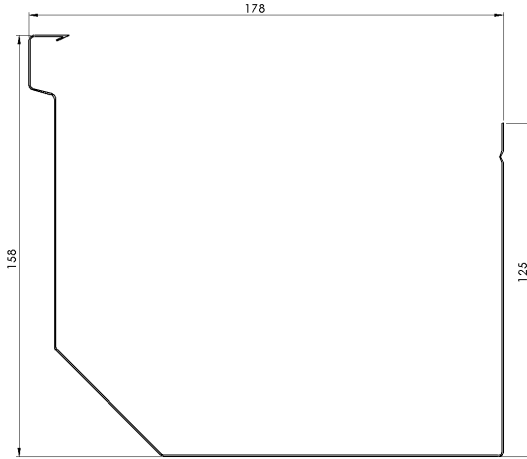

PRODUCT SPECIFICATIONS		CAPACITY SPECIFICATIONS	
<b>MagnaFlow™</b> Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.	Maximum cross sectional area	20,030mm <sup>2</sup>
<b>AlumiGard™</b> Pre-painted Aluminium	0.70mm Grade 5005 H34	Effective cross sectional area with 15mm freeboard	17,525mm <sup>2</sup>
<b>EuraMax</b> Pre-painted Aluminium	0.80mm Grade 5754 H42	Flow Capacity	322 Litres/min
<b>Pure Copper</b> Copper 3/4 Hard	0.60mm Grade C12200	Minimum recommended fall	1:500 = 2mm per 1 metre
External Bracket	4.50mm Aluminium 6060 T5 4-6.00mm Copper	Recommended minimum downpipe cross section	4,776mm <sup>2</sup>
Recommended Maximum bracket spacing	600mm	Recommended round standard downpipe sizes	100mm Ø = 7,539mm <sup>2</sup> 80mm Ø = 4,776mm <sup>2</sup>
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.	Recommended rectangle standard downpipe sizes	4x2" = 5,346mm <sup>2</sup>

<b>Scope of use</b>	Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope).
<b>NZBC Compliance</b>	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
<b>Durability</b>	All copper and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
<b>Maintenance</b>	Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website <a href="http://www.continuous.co.nz/care-and-maintenance">www.continuous.co.nz/care-and-maintenance</a>
<b>Warranty</b>	<b>MagnaFlow™</b> : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. <b>MagnaFlow™</b> : Environment zone D—10 year paint warranty ; 10 year perforation warranty. <b>AlumiGard™</b> : 10 year paint warranty ; 12 year perforation warranty. <b>Pure Copper &amp; EuraMax</b> : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at <a href="http://www.continuous.co.nz/warranties">www.continuous.co.nz/warranties</a>