



**BIG CHIEF**  
150mm OG CLASSIC

### Overview

Whether your place has a big roof or a higher than normal rainfall, Big Chief will catch and distribute it all. With it's massive 9800mm<sup>2</sup> capacity, the Big Chief has your place covered

### Features

- ✓ Great for water collection
- ✓ Bigger width makes it easier to clean
- ✓ Tough marine grade materials
- ✓ Bracket options to suit
- ✓ Up to 20 year material warranty
- ✓ Matching downpipes
- ✓ 15 standard colours and more!



Titania with Internal Bracket



Lignite with External Bracket

Finish Range	Spouting Material	Colour Choice	Bracket Material	Bracket Options	Downpipe Options
CG Range	MagnaFlow™	Top 15 Colours	Aluminium	Internal OG-6 External OG-6	65mm Round 80mm Round
Designer Range	MagnaFlow™	34 Designer Colours	Aluminium		100mm Round
Copper	Pure Copper	Natural	Copper		3x2" Rectangle 4x2" Rectangle


### Available from these Continuous Group Locations:

NORTHLAND | AUCKLAND | WAIKATO | BAY OF PLENTY  
TARANAKI | GISBORNE | HAWKES BAY | MANAWATU | WELLINGTON  
NELSON | MARLBOROUGH | WEST COAST | CANTERBURY | OTAGO | SOUTHLAND



# BIG CHIEF

## 150mm OG CLASSIC

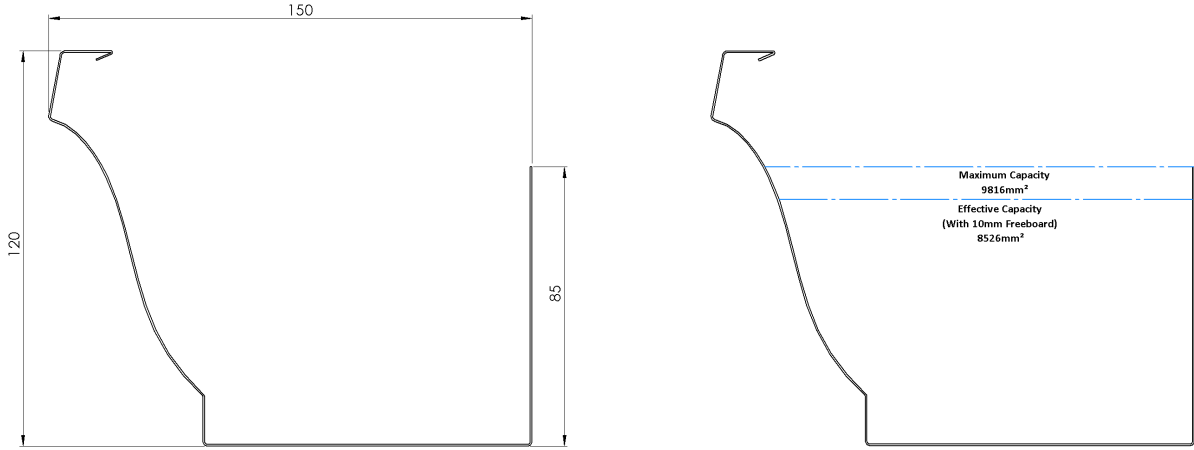

PRODUCT SPECIFICATIONS		CAPACITY SPECIFICATIONS	
<b>MagnaFlow™</b> Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.	Maximum cross sectional area	9,816mm <sup>2</sup>
<b>Pure Copper</b> Copper 3/4 Hard	0.60mm Grade C12200	Effective cross sectional area with 10mm freeboard	8,526mm <sup>2</sup>
Internal Bracket	2.50mm Aluminium 5052 H34 2.50mm Copper—hard (C12200)	Flow Capacity	131 Litres/min
External Bracket	3.00mm Aluminium 5052 H34 2.50mm Copper—hard (C12200)	Recommended fall	1:500 = 2mm per 1 metre
Recommended Maximum bracket spacing	750mm 600mm where snow fall is possible	Minimum Downpipe cross section	3,215mm <sup>2</sup>
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.	Recommended round standard downpipe sizes	100mm Ø = 7,539mm <sup>2</sup> 80mm Ø = 4,776mm <sup>2</sup>
		Recommended rectangle standard downpipe sizes	4x2" = 5,346mm <sup>2</sup> 3x2" = 3,996mm <sup>2</sup>

<b>Scope of use</b>	Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope).
<b>NZBC Compliance</b>	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
<b>Durability</b>	All copper and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
<b>Maintenance</b>	Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website <a href="http://www.continuous.co.nz/care-and-maintenance">www.continuous.co.nz/care-and-maintenance</a>
<b>Warranty</b>	<b>MagnaFlow™</b> : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. <b>MagnaFlow™</b> : Environment zone D—10 year paint warranty ; 10 year perforation warranty. <b>Pure Copper</b> : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at <a href="http://www.continuous.co.nz/warranties">www.continuous.co.nz/warranties</a>